

# SPIDER 30




## LIGHTWEIGHT AND VIRTUALLY TRANSPARENT LED DISPLAY

The Spider 30 is a virtually transparent LED Video Display System combining extremely light weight with rugged fast rig mechanics and a powerful and versatile processing system. This product outperforms many of the low resolution creative systems launched in recent years. It is ideally suited to entertainment, TV and corporate applications where a lightweight and visually striking effect is required.

The Spider 30 offers a 30mm pixel pitch, 2000 Nit output and rugged IP65 rating. Wide viewing angles are accompanied by excellent image integrity and color uniformity, creating a depth and consistency of colour across the entire display.

A modular system, the Spider 30 can be installed with ease and minimal manpower and offers unique design possibilities, allowing you to create spectacular visual effects utilising a cost-effective, simple and reliable display solution.

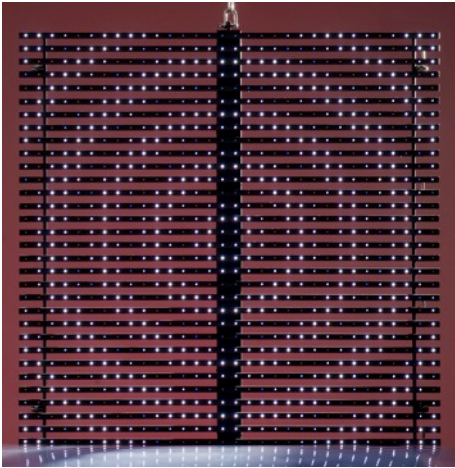


## Key Benefits

- High performance and affordable
- Lightweight
- Virtual transparency
- Indoor/outdoor applications
- Wide viewing angles
- IP65 rating

## Specification

<b>Pixel pitch</b>	30mm
<b>Brightness (Nit or cd/m<sup>2</sup>)</b>	2000
<b>Transparency</b>	50%
<b>LED type</b>	3 in 1 SMD
<b>Module size (mm) w x h x d</b>	960 x 960 x 138
<b>Module size (inches) w x h x d</b>	37.8 x 37.8 x 5.43
<b>Pixels / Module</b>	32 x 32
<b>Pixels / m<sup>2</sup></b>	1111
<b>Viewing Horizontal / Vertical</b>	>120° / >120°
<b>Weight / tile</b>	14.8kg / 32.63lbs
<b>Weight / m<sup>2</sup></b>	16.1kg / 35.49lbs
<b>IP Front / Back</b>	IP65 / IP54
<b>Colours</b>	68 billion
<b>Processing</b>	Up to 1920 x 1080
<b>Input frequency</b>	50 / 60Hz
<b>Refresh rate</b>	1000 Hz
<b>Processor</b>	MVS v3 and v4
<b>Max power / tile (W)</b>	300
<b>Avg power / tile (W)</b>	130
<b>Temperature</b>	-20 to 50°C / -4 to 122°F

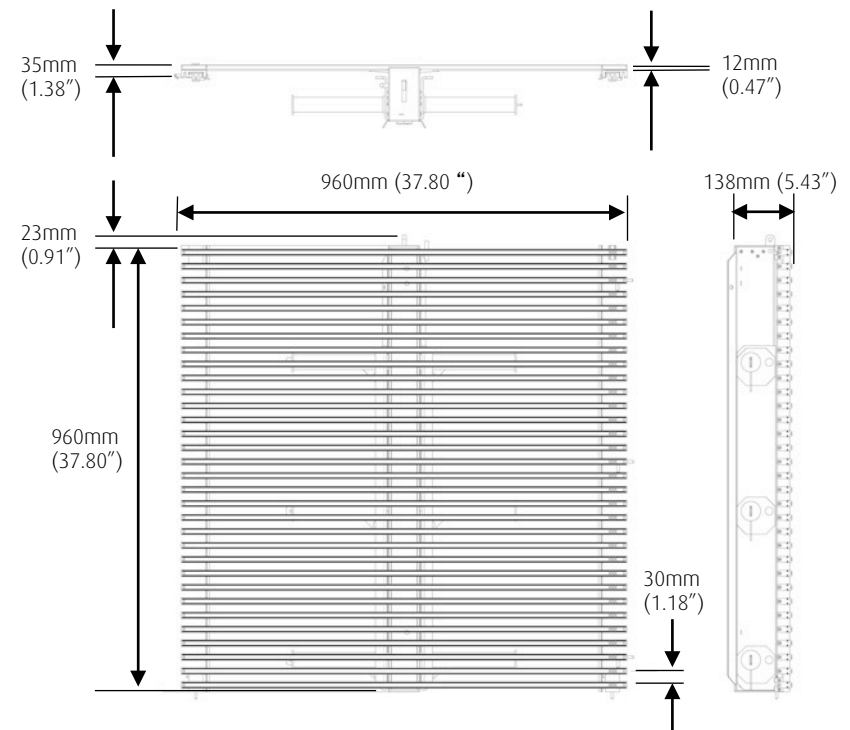

Creative Technology Ltd  
Unit E2  
Sussex Manor Business Park  
Crawley  
West Sussex  
RH10 9NH

Tel.: +44 (0)1293 582000  
Fax: +44 (0)1293 582010  
info@ctlondon.com  
www.ctlondon.com